



(3) SRW-CC / SRW-HC

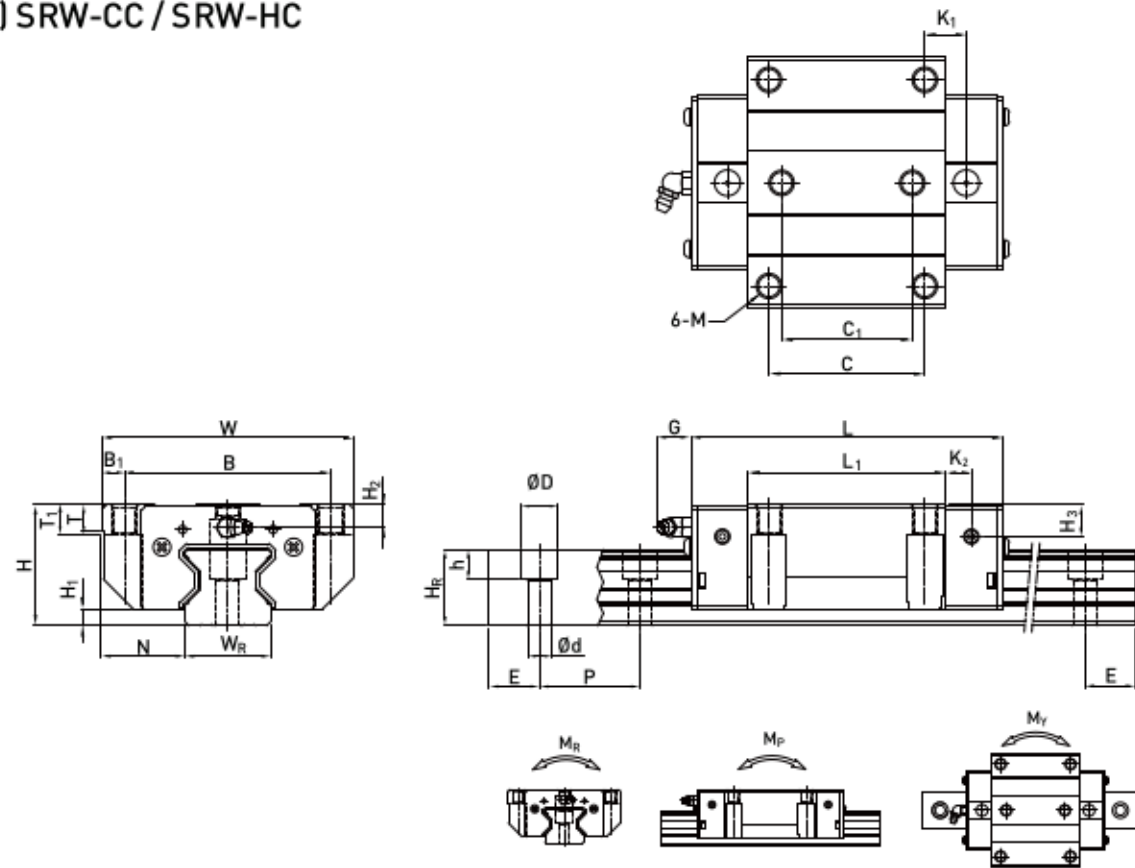

(4) Dimensions for SRR-T (Rail Mounting from Bottom)

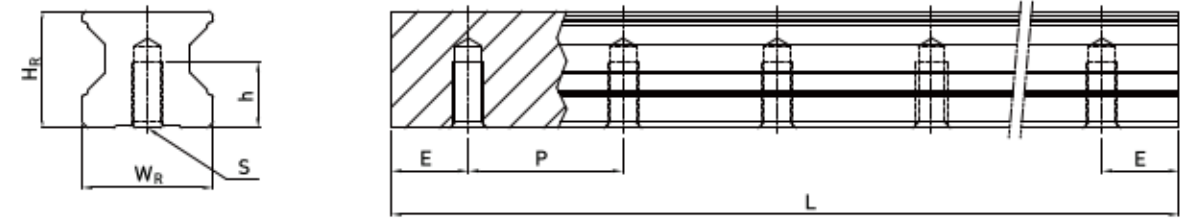

Model No.	Dimensions of Assembly (mm)			Dimensions of Block (mm)										Dimensions of Rail (mm)					Mounting Bolt for Rail (mm)	Basic Dynamic Load Rating C <sub>100R</sub> (kN)	Basic Static Load Rating C <sub>0</sub> (kN)	Static Rated Moment			Weight										
	H	H <sub>1</sub>	N	W	B	B <sub>1</sub>	C	C <sub>1</sub>	L <sub>1</sub>	L	K <sub>1</sub>	K <sub>2</sub>	G	M	T	T <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>				W <sub>R</sub>	H <sub>R</sub>	D	h	d	P	E	M <sub>s</sub> (kN-m)	M <sub>p</sub> (kN-m)	M <sub>r</sub> (kN-m)	Block (kg)	Rail (kg/m)		
SRW25CC	36	5.5	23.5	70	57	6.5	45	40	64.5	97.9	15.75	7.25	12	M8	9.5	10	6.2	6	23	23.6	11	9	7	30	20	M6x20	27.7	57.1	0.758	0.605	0.605	0.72	3.08		
SRW25HC									81	114.4	24																								
SRW30CC	42	6	31	90	72	9	52	44	71	109.8	17.5	8	12	M10	9.5	10	6.5	7.3	28	28	14	12	9	40	20	M8x25	39.1	82.1	1.445	1.06	1.06	1.16	4.41		
SRW30HC									93	131.8	28.5																								
SRW35CC	48	6.5	33	100	82	9	62	52	79	124	16.5	10	12	M10	12	13	9	12.6	34	30.2	14	12	9	40	20	M8x25	57.9	105.2	2.17	1.44	1.44	1.75	6.06		
SRW35HC									106.5	151.5	30.25																								
SRW45CC	60	8	37.5	120	100	10	80	60	106	153.2	21	10	12.9	M12	14	15	10	14	45	38	20	17	14	52.5	22.5	M12x35	92.6	178.8	4.52	3.05	3.05	3.43	9.97		
SRW45HC									139.8	187	37.9																								
SRW55CC	70	10	43.5	140	116	12	95	70	125.5	183.7	27.75	12.5	12.9	M14	16	17	12	17.5	53	44	23	20	16	60	30	M14x45	130.5	252	8.01	5.4	5.4	5.43	13.98		
SRW55HC									173.8	232	51.9																								
SRW 65CC	90	12	53.5	170	142	14	110	82	160	232	40.8	15.8	12.9	M16	22	23	15	15	63	53	26	22	18	75	35	M16x50	213	411.6	16.20	11.59	11.59	11.63	20.22		
SRW 65HC									223	295	72.3																								

Note : 1. 1 kgf = 9.81 N  
 2. The theoretical dynamic rated load is C<sub>100R</sub>, if necessary C<sub>50R</sub> conversion formula is as follows : C<sub>50R</sub> = 1.23 x C<sub>100R</sub>

Model No.	Dimensions of Rail (mm)						Weight (kg/m)
	W <sub>R</sub>	H <sub>R</sub>	S	h	P	E	
SRR25T	23	23.6	M6×1P	12	30	20	3.36
SRR30T	28	28	M8×1.25P	15	40	20	4.82
SRR35T	34	30.2	M8×1.25P	17	40	20	6.48
SRR45T	45	38	M12×1.75P	24	52.5	22.5	10.83
SRR55T	53	44	M14×2P	24	60	30	15.15
SRR65T	63	53	M20×2.5P	30	75	35	21.24